


RS-121 Super GAMMA-RAY SCINTILLOMETER with Memory Providing Search and Scan Modes of Operation

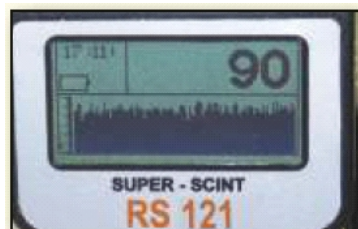

RS-121 – Ideal For Field Exploration

The RS-121 Scintillometer is the state-of-the-art in a portable hand-held radiation survey search device for the geophysical industry. It offers an integrated design with a large detector, direct Survey readout, Scan mode, data storage, full weather protection and ease of use. In addition, it has **Wireless Connectivity** providing for wireless connection to an external GPS receiver, earphone or computer.

Features Include:

- ❑ High Sensitivity with large 2.0 x 2.0 NaI crystal 103 cm³ (6.3 in³)
- ❑ Lightweight & rugged 4.4 lb (2 kg), including batteries
- ❑ Easy to use, single button
 - **survey** and **scan** modes of operation
- ❑ 5-digit LCD display with high count rate – 65,535 cps
 - scrolling histogram graph display of last 100 readings
- ❑ Fast audio output with adjustable audio threshold set point
 - Wireless Connectivity earphone audio support for surveying in noisy environments
- ❑ Wireless Connectivity and USB equipped with external GPS integrated into data stream
- ❑ Special rugged design to withstand typical field usage, full IP67 weatherproofing short term water immersion and fully dust protected
- ❑ Low power (4 x AA batteries)
 - typical 8 – 12 hour battery life at 20 °C
- ❑ No radioactive sources required for proper operation



The RS-121 allows the user to produce profiles of the total count data from either the Search or Scan modes. The data can be from a drill core scan or from a survey with GPS positioning data.

Survey Mode (Total Count)

The loud linear audio permits eyes-free operation with large easy to read 5 digit display showing the total count in cps at 1/sec update rate. It also has Wireless Connectivity earphone audio support for surveying in noisy environments.

Scan Mode

A variable rate scan mode (1 – 20 sec.) stores the data in memory. An external GPS can also be integrated into the data system via wireless connection to provide location data.

RS-Analyst Software

The RS-121 is provided with utility software to download the data that is stored in memory. All data in memory can be transmitted via Wireless Connectivity or USB to the RS-Analyst program on a PC. This may take the form of field or Scan data + GPS. The program also gives graphical and numeric views of the data. The data can also be re-exported as a text file for further processing.



Standard Accessories

- RS-121 Scintillometer with carrying handle
- Removable protective boot with shoulder strap
- Battery cartridge with 4 x AA rechargeable batteries & charger
- Spare battery holder cartridge
- RS-Analyst utility software
- USB cable
- User guide
- Delivered in hard case with foam insert

Specifications:

Temperature Range:

- -20 °C to +50 °C

Control:

- Single one button, thumb activated

Internal Memory:

- 4MB providing more than 1,146,870 one second readings

Data Output:

- Wireless Connectivity and USB

Alarm:

- Audio via miniature speaker
- Variable audio threshold set point
- Audio proportional to count rate

Weight:

- 4.4 lb (2 kg) including batteries

Size & Package Style:

- 10.2" x 3.2" x 3.8" (259mm x 81 mm x 96 mm)
- 1 mm aluminum thick outer case
- In a flashlight configuration with detachable handle

Display:

- 128 x 64 pixels, 1 1/8 x 2 3/8"
- Graphic LCD display with white black light and automatic dimming
- Counts in CPS from 0 to 65,535 and Histogram chart
- Update Rate: 1x / sec

Energy Response:

- 30 keV 3000 keV

Internal Sampling:

- 30 / second

Batteries:

- Internal battery pack module (4xAA) easily replaceable
- Rechargeable or Alkaline
- Life: 8+ hours at 20 °C

Specifications subject to change without notice # 06.12



Terraplus Inc.
120 West Beaver Creek Rd, Unit #15
Richmond Hill, ON, Canada, L4B 1L2

terraplus.ca
1.905.764.5505
sales@terraplus.ca